


USE THIS INSTALLATION PROCEDURE WHEN SLOPE IS 3:12 or GREATER,
REGARDLESS WHETHER ENGLERT H/T UNDERLAYMENT IS OVER ENTIRE ROOF
or ONLY ALONG PERIMETERS.

WHEN SLOPE IS LESS THAN 3:12, CONSULT ENGLERT TECHNICAL DEPARTMENT.

- 1) PLACE ONE 36" WIDE PIECE OF UNDERLAYMENT DOWN MIDDLE OF VALLEY WITH 18" OF COVERAGE ON EACH SIDE.
- 2) CUT ONE 36" WIDE PIECE IN HALF TO CREATE 18" STRIPS.
- 3) PLACE ONE 18" STRIP ON EACH SIDE OF VALLEY AS SHOWN. SHINGLE LAP UNDERLAYMENT BY 6" MINIMUM. MAXIMIZE VALLEY COVERAGE.
- 4) WHEN NECESSARY, END LAP UNDERLAYMENT BY 6" MINIMUM.

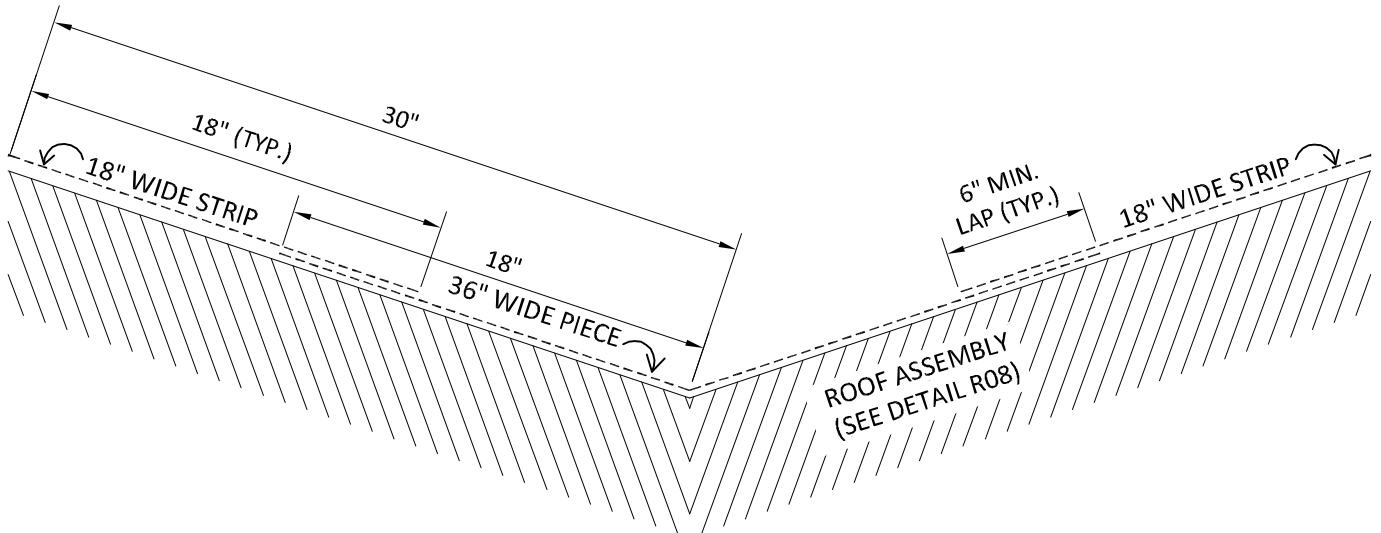

 **ENGLERT**[™]
www.englertinc.com
800-364-5378

GENERIC BEST PRACTICE ASSEMBLY
SHOWN. WATERTIGHTNESS
WARRANTY NOT IMPLIED.
WHEN SITE CONDITION DIFFERS,
SPECIFIC ENGINEERING NECESSARY.

ROOF VALLEY	
VALLEY UNDERLAYMENT	

DETAIL SUBJECT TO CHANGE WITHOUT NOTICE.
Detail # R14