

**Don't let contours throw you a curve...**

**Englert now offers the rental of equipment to curve 1" or 1 1/2" Series 1300 panels. Contact the sales office nearest you for details and rental information.**


**C1300 - 1" or 1 1/2" Mechanically Seamed Panel**

The curved 1300 system, at 1 1/2" tall, can be brought down to a minimum radius of 24" in aluminum, or 100" in steel. This system, although rugged in design, requires a solid deck for installation, and carries the 1300 UL listing (16" width) with proper fastening. Both the 1" and 1 1/2" profiles can be locked with a 90° fold or a slim 180° fold. Panel widths for this application are infinitely adjustable from 12" to 28" in all metals and seam configurations.



Material	Minimum Radius		Convex Curve	Tapered Curve	Elliptical Curve
	1" seam	1 1/2" seam			
<b>Aluminum</b> (up to .040")	24"	24"	•	•	•
<b>Copper</b> (up to 20 oz.)	24"	30"	•	•	•
<b>Steel</b> (up to 24 ga.)	60"	100"	•	•	•
<b>Stainless Steel</b> (up to 26 ga.)	120"	160"	•	•	•

**Designed to accommodate arched canopies and walkway covers, Englert's curved version of the popular 1300 profile meets the needs of today's architects.**

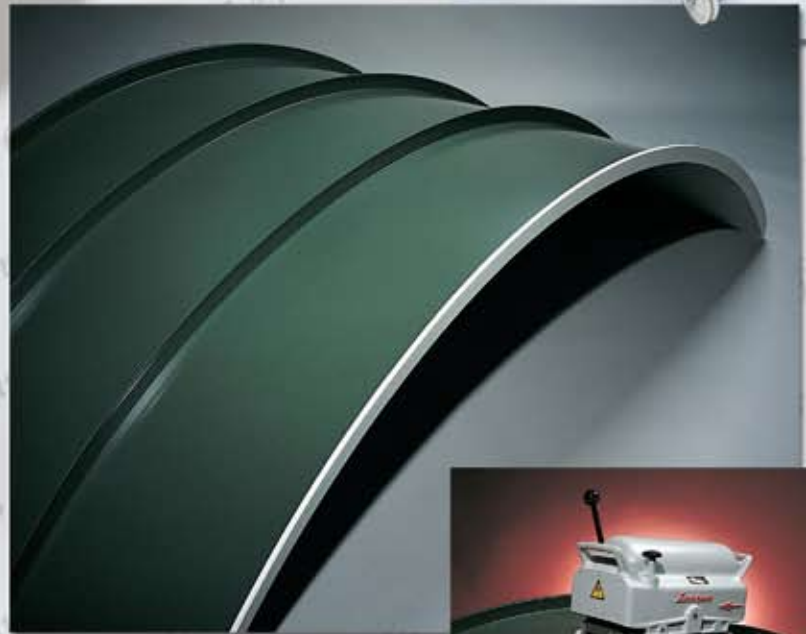

**Englert Inc. Corporate Headquarters:**  
1200 Amboy Avenue, Perth Amboy, NJ 08861  
Phone: (732) 826-8614 • Fax: (732) 826-8865

**www.englertinc.com • (800) 610-1975**

**Englert Branch Offices**

Colorado	303-288-8070	New Jersey	732-376-1110
Connecticut	203-265-6704	New York	631-491-7700
Tampa, FL	813-248-2296	Pennsylvania	412-461-1355
Ft. Lauderdale, FL	954-424-4533	South Carolina	803-783-4515
Massachusetts	978-774-0006	Tennessee	865-970-0090
		Virginia	703-367-9430



**...another fine product from**  

**ENGLERT™**  
**the metal experts**