



2.67" x .75 CORR. STANDARD ACCESSORIES

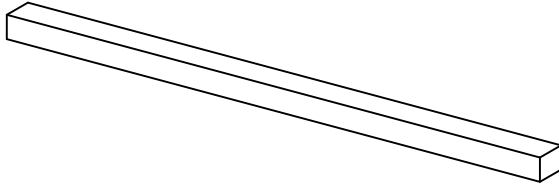

REQ'D: _____ LIN. FT. (25' ROLLS)

1" x 1" UNIVERSAL CLOSURE

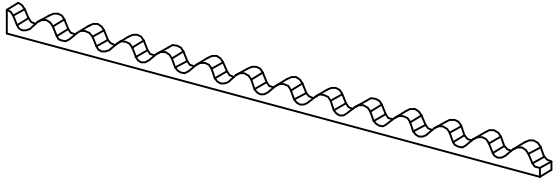

REQ'D: _____ PCS. @ 3'-0" LG.


2.67" x 3/4" CORR. CLOSURES

ROOF SHEETING SCREWS



#12/14 x 2" SDWW
REQ'D: _____ PCS.


STANDARD FASTENERS



REQ'D: _____ ROLLS @ 50'-0" LG.


3/32" x 1/2" SEALER TAPE "ST1"

SIDING SHEETING SCREWS



#12/14 x 1 1/2" SDWW
REQ'D: _____ PCS.

LAP & TRIM SCREWS



1/4-14 x 7/8" SDWW
REQ'D: _____ PCS.

STANDARD FASTENERS

NOTES:

1. 2.67" x .75 CORRUGATED CLOSURES ARE A CLOSED CELL POLYETHYLENE FACTORY FORMED TO THE PANEL PROFILE AS SHOWN ABOVE.
2. SEALER TAPE IS A NON-DRYING, NON-SKINNING, BUTYL BASE TAPE SUPPLIED IN 3/32" THICK x 1/2" WIDE x 50' ROLLS.
3. FASTENERS ARE ZINC PLATED CARBON STEEL, 5/16" HEX HEAD, SELF DRILLING & SELF TAPPING METAL SCREWS. FASTENERS CAN BE SUPPLIED WITH PAINTED HEADS TO MATCH ROOFING OR SIDING.
4. CONTACT FACTORY FOR PRICE AND AVAILABILITY OF NON-STANDARD ACCESSORIES.

 **ENGLERT™**
www.englertinc.com
800-364-5378

2.67" x .75 CORRUGATED STANDARD DETAILS
STANDARD ACCESSORIES

DETAIL SUBJECT TO CHANGE WITHOUT NOTICE.

Detail #
W.75.17

GENERIC BEST PRACTICE ASSEMBLY SHOWN. WATERTIGHTNESS WARRANTY NOT IMPLIED. WHEN SITE CONDITION DIFFERS, SPECIFIC ENGINEERING NECESSARY.

Project:
Date:

Scale: NTS

Location:

By: